

Imagine.

DVE  
Digital Value Engineering

Roland®

# PRINT & CUT VersaUV LEC-330

UV-LED Inkjet Printer/Cutter


## Achieve Finer Quality, Higher Productivity and Greater Versatility with Our Newest UV Inkjet Printer/Cutter

Introducing the next generation in award-winning Roland UV-LED inkjet technology: the compact VersaUV LEC-330 UV inkjet printer/cutter. The LEC-330 is our fastest, most powerful UV inkjet to date, delivering unmatched print quality across an even wider range of materials for high quality package prototyping, control panel production, and small lot production of labels and decals.



Max. acceptable media width: 762 mm (30")

Max. print/cut width: 736 mm (29")



### Better Productivity and Lower Ink Consumption

With the LEC-330, we have increased the print speed and lowered your running costs for maximum value and efficiency. The LEC-330 allows you to handle urgent requests by delivering finished prototypes, labels and products to your customers the next day. For example, the LEC-330 can print 100 wine bottle labels (as shown) in 46 minutes\*1 To reduce operating costs, the LEC-330 comes with an automatic white ink circulation system that prevents the pigment from settling. As a result, ink waste is minimized and you can print continuously without interruptions.

\*1 Print description: Each label above is 104 x 99 mm (4" x 3.9") and was printed in CMYK in standard print mode using Roland VersaWorks® RIP software.


### Unmatched Quality Across a Wider Variety of Materials

The LEC-330 prints on a wide variety of media such as paper, film and leather. In addition, it supports card stock, plastic board, polycarbonate and other rigid substrates (except metals) up to 1 mm (0.04") thick for a wide variety of prototyping applications.\*2 New high-quality artistic print mode (1440 x 1440 dpi) is ideally suited for offset and gravure printers that require sharp, detailed graphics and text for their prototypes. Print quality is further enhanced by Roland Intelligent Pass Control® technology which delivers smooth gradations and flawless solid fills with virtually no banding in every print mode. White ink allows you to print on dark or transparent substrates with brilliant color.

\*2 For best results, test print your LEC-330 graphics on each substrate before production.

### Unique Special Effects and Digital Die Cutting — All in One Device

The LEC-330 prints your design beautifully in CMYK+White ink and finishes graphics with rich special effects created by multiple layers of clear coat. Choose any combination of matte and glossy finishes and layer them for interesting patterns — even Braille. Use white ink to print on transparent and shrinkwrap film for food packaging prototypes. No additional die cutting is necessary because the LEC-330 prints and digitally die cuts graphics in virtually any shape automatically through one seamless workflow.

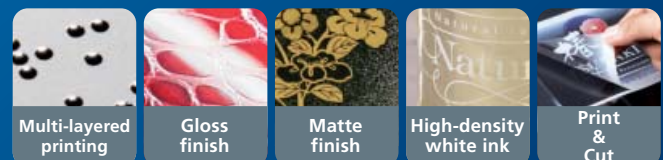

### Three Ink configurations to Support Your Business Demands

When installing the LEC-330, you can choose from three ink combinations to meet your business requirements. The standard ink configuration, CMYK+White+Gloss, allows you to use all available LEC-330 ink options for the widest variety of applications. Select the high-opacity white ink configuration, CMYK+White+White, to print on transparent films for soft package prototyping. Take full advantage of thick gloss ink effects such as embossing with the CMYK+Gloss+Gloss configuration, perfect for prototypes that do not call for transparent media. This ink combination allows you to apply gloss ink twice as fast as the standard configuration.

## Specifications

|   |                            |   |
|---|----------------------------|---|
| <b>Printing technology</b>  |                            | Piezo electric inkjet   |
| <b>Media</b>  | <b>Width</b>               | 182 to 762 mm (7.2 to 30 in.)   |
|   | <b>Thickness</b>           | Maximum 1.0 mm (39 mil) with liner, for printing<br>Maximum 0.4 mm (16 mil) with liner and 0.22 mm (9 mil) without liner, for cutting   |
|   | <b>Roll outer diameter</b> | Maximum 180 mm (7.1 in.)  |
|   | <b>Roll weight</b>         | Maximum 20 kg (44 lb.)  |
|   | <b>Core diameter</b>       | 50.8 mm (2 in.) or 76.2 mm (3 in.)  |
| <b>Printing / cutting width<sup>1</sup></b>   |                            | Maximum 736 mm (29 in.)   |
| <b>Ink cartridges</b>   | <b>Types</b>               | Roland ECO-UV INK   |
|   | <b>Capacity</b>            | 220 cc  |
|   | <b>Colors</b>              | Six colors (cyan, magenta, yellow, black, white, and gloss)   |
| <b>Ink-curing unit</b>  |                            | Dual UV LED Lamp  |
| <b>Printing resolution (dots per inch)</b>  |                            | Maximum 1440 dpi  |
| <b>Cutting speed</b>  |                            | 10 to 600 mm/s (10 to 300 mm/s in media-feed direction)   |
| <b>Blade force</b>  |                            | 30 to 300 gf  |
| <b>Blade offset compensation</b>  |                            | 0.000 to 1.500 mm (0 to 0.0591 in.)   |
| <b>Software resolution (when cutting)</b>   |                            | 0.025 mm/step (0.000984 in./step)   |
| <b>Distance accuracy (when printing)<sup>2</sup></b>                                |                            | Error of less than ±0.3% of distance traveled, or ±0.3 mm, whichever is greater   |
| <b>Distance accuracy (when cutting)</b>   |                            | Error of less than ±0.4% of distance traveled, or ±0.3 mm, whichever is greater<br>When distance correction has been performed (when the setting for [CUTTING MENU] - [CALIBRATION] has been made): Error of less than ±0.2% of distance traveled, or ±0.1 mm, whichever is greater |
| <b>Repetition accuracy (when cutting)<sup>3</sup></b>                               |                            | ±0.1 mm or less   |
| <b>Alignment accuracy for printing and cutting<sup>4</sup></b>                      |                            | ±0.5 mm or less   |
| <b>Alignment accuracy for printing and cutting when reloading media<sup>5</sup></b> |                            | Error of less than ±0.5% of distance traveled, or ±3 mm, whichever is greater   |
| <b>Connectivity</b>   |                            | Ethernet (10BASE-T/100BASE-TX, automatic switching)   |
| <b>Power-saving function</b>  |                            | Automatic sleep feature   |
| <b>Power requirements</b>   |                            | AC 100 to 240 V ±10%, 50/60 Hz, Maximum 4.2 A   |
| <b>Power consumption</b>  | <b>During operation</b>    | Maximum 370 W   |
|   | <b>Sleep mode</b>          | Approx. 15.3 W  |
| <b>Dimensions (with stand)<sup>6</sup></b>  |                            | 2,200 (W) x 820 (D) x 1,260 x (H) mm (86.6 (W) x 32.3 (D) x 49.6 (H) in.)   |
| <b>Weight (with stand)</b>  |                            | 177 kg (390.2 lb.)  |
| <b>Environmental</b>  | <b>Power on</b>            | Temperature: 20 to 32°C (68 to 90°F) (22°C [72°F] or higher recommended), humidity: 35 to 80% (no condensation)   |
|   | <b>Power off</b>           | Temperature: 5 to 40°C (41 to 104°F), humidity: 20 to 80% (no condensation)   |
| <b>Accessories</b>  |                            | Stands, power cord, blade, blade holder (XD-CH2), media clamps, replacement blade for separating knife, cleaning kit, software RIP (Roland VersaWorks), and user's manual, etc.   |

<sup>1</sup> The length of printing or cutting is subject to the limitations of the program.

<sup>2</sup> Using Roland specified media, print travel of 1m, temperature: 25°C (77°F), humidity: 50%RH

<sup>3</sup> Using Roland specified media, loaded on the shaft, [PREFEED] menu item must be set to "ENABLE," with 25 mm or more for both right and left margins and 35 mm or more front margin, excluding expansion or contraction of the media. Media 3,000 mm long.

<sup>4</sup> Provided that media length is under 3,000 mm. Temperature: 25°C (77°F). Excluding possible shift caused by expansion or contraction of the media and/or by reloading the media.

<sup>5</sup> Using Roland specified media, data size: 1,000 mm in the media-feed direction, 736 mm in the carriage-movement direction. No lamination. Automatic detection of crop marks at 4 points when media is reloaded. During cutting, [PREFEED] menu item must be set to "ENABLE." Temperature: 25°C (77°F). Excludes the effects of slanted movement and of expansion and contraction of the media.

<sup>6</sup> During operation of the media take-up system, an operating range of approximately 80 mm back from the front edge of the dancer roller is required.

## Roland VersaWorks System Requirements

|                               |   |
|-------------------------------|---|
| <b>Operating system</b>       | Windows® 7 Professional or Ultimate (32-bit);<br>Windows Vista® Business/Ultimate Service Pack 1 (32-bit); Windows Vista® Business/Ultimate (32-bit);<br>Windows® XP Professional Service Pack 2 or later |
| <b>CPU</b>                    | Core™2 Duo, 2.0 GHz or faster recommended   |
| <b>RAM</b>                    | 1 GB or more recommended (Windows 7 and Vista: 2 GB or more recommended)  |
| <b>Video card and monitor</b> | A resolution of 1,280 x 1,024 or more recommended   |
| <b>Free hard-disk space</b>   | 40 GB or more recommended   |
| <b>Hard-disk file system</b>  | NTFS format   |
| <b>Optical drive</b>          | DVD-ROM drive   |

## Roland VersaWorks-Compatible Application Software

Adobe® Illustrator® 10, CS, CS2, CS3, CS4, CorelDRAW® 11, 12, X3

| Options                | Model                | Description  |
|------------------------|----------------------|--|
| <b>ECO-UV Media</b>    | DuPont™ Tyvek® 1056D | Nonwoven lightweight, 760 mm x 50 m (29.9' x 164')           |
| <b>ECO-UV Ink</b>      | EUV-MG               | Magenta, 220cc   |
|                        | EUV-YE               | Yellow, 220cc  |
|                        | EUV-CY               | Cyan, 220cc  |
|                        | EUV-BK               | Black, 220cc   |
|                        | EUV-WH               | White, 220cc   |
|                        | EUV-GL               | Gloss, 220cc   |
| <b>Cleaning liquid</b> | SL-CL                | 1 pc.  |
| <b>Blades</b>          | ZEC-U5022            | For thick, reflective and fluorescent vinyl, 2pcs.           |
|                        | ZEC-U5025            | For thick, reflective and fluorescent vinyl, 5pcs.           |
| <b>Blade holder</b>    | XD-CH2               | Blade holder with blade extension adjuster, made of aluminum |



Vaporized components may slightly irritate the eyes, nose and/or throat during and following printing with this product. If continuously printing in a closed space, the density of volatile compositions will accumulate and may irritate the eyes, nose and/or throat. Roland strongly recommends that you install a ventilation system and use this product in a well-ventilated room. For more information, please contact your local distributor or dealer.

### About White Ink

The pigment in white ink will settle in the cartridge and ink flow system. Due to the nature of white ink, you must shake the cartridge before each use.

Roland DG products that feature this environmental label meet the company's criteria for environmental consciousness, a set of standards based on ISO 14021 self-declaration type II. For more information, please visit [www.rolanddg.com](http://www.rolanddg.com).



As an ENERGY STAR® partner, Roland DG Corporation has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR is a U.S. registered mark.



### ISO 14001:2004 and ISO 9001:2008 Certified

Roland pursues both environmental protection and continuous quality improvement. Under the philosophy of preserving the environment and human health, Roland is actively working to abolish organic solvents in production, to reduce and recycle waste, to reduce power use, and to purchase recycled products. Roland constantly strives to provide the most highly reliable products available.



Roland reserves the right to make changes in specifications, materials or accessories without notice. Your actual output may vary. For optimum output quality, periodic maintenance to critical components may be required. Please contact your Roland dealer for details. No guarantee or warranty is implied other than expressly stated. Roland shall not be liable for any incidental or consequential damages, whether foreseeable or not, caused by defects in such products. Adobe, PostScript, PostScript 3 and the PostScript logo are trademarks of Adobe Systems Incorporated. All trademarks are the property of their respective owners. Roland DG Corp. has licensed the MMP technology from the TPL Group.



**AUTHORIZED DEALER:**

Printed in Japan. RDG-416074599 10 SEP C-3 P-5